



SPECIFICATION FOR APPROVAL

() Preliminary Specification

(●) Final Specification

Title	27"W QHD MONITOR 承認書
-------	----------------------

STATE	
MODEL	

SUPPLIER	深圳市鹏梁电子有限公司
*MODEL	EED PL270A01
APPROVAL NO	工程专用章

APPROVED BY	SIGNATURE	DATE
/		
		2011/08/01
		2011/08/01

Please return 1 copy for your confirmation with your signature and comments.





1 . 27"W MONITOR SPECIFICATION

Model Name		27" W	
		LTM270HT03	
		* 597.6(H) x 336.15(V)	
		* 0.10375(H) x 0.31125(W)	
		* 16.7M (Hi-FRC)	
		* 2560 x 1440	
		* 380 (typ) cd/m	
		* DCR 5,000,000 : 1	
		* DVI to DP	
Display	Visible Diagonal	27"W QHD TFT LCD	
	Display Area (mm/Inch)	597.6(H) x 336.15(V)	
	Pixel Pitch	0.10375(H) x 0.31125(W)	
	Aspect Ratio	16:9 Wide	
	Display colors	16.7M (Hi-FRC)	
	Resolution	2560 x 1440	
	Brightness (cd/m ²)	380 (typ) cd/m	
	DCR	5,000,000 : 1	
	Viewing Angle (H°/V°)	178° / 178°	
	Response Time (ms)	6msec (GtoG)	
Sound System		Power Consumption	Total90.85Watt(Typ)
Terminals	In & output	PC Analog input (RGB, DVI)	Yes
		PC Audio IN	No
OSD Languages		Eng/Deu/Fre/Ita/Spa/Kor	
Power	Input Voltage	DC Adapter(100~240V AC 50 / 60 Hz)	
	Consumption On/Working	60W	
Mechanical Features	Wall Mounting hole	Yes	
	VESA Mounting hole	100mmX100mm	
	STAND	TILT And SWIVEL(30°)	
Dimension(mm)	BOX (W x D x H)	695x165x500mm	
Weight (kg/lbs)	NET Weight	5.5kg	
	Packed Weight	6.5kg	
Accessories		1. Default: Power Cord, D-sub Cable, U ser's Guide	
Loading Q'ty(PCS)	40ft High Container	950	
	40ft Container	850	
	20ft Container	400	



2 . 27"W MONITOR DESIGN




**3 . GENERAL DESCRIPTION**

ITEM	PART NUMBER	VENDOR
CASE	PL-270A01(27")	PL
FRONT SILK	P270"W 5 key	P STD
BACK SILK	P270"W DVI	P STD
SPEAKER	3W x2 (6W)	SHIHUAN
AD BOARD	K-800	KANG JIN
CONVERTER	SANGN-3.1	SANGN
CONVERTER CABLE	2468#26 /2.0-6P x250mm	YONGHUA
ADAPTER	SMS-00240500-S01 (12V5A)	SAMSON
BACK LIGHT CABLE	DF14/6P MX1.25/6P,L=400mm	JYD
LVDS CABLE	30P/1.0pitch / L300mm	WENXIN
KEY CABLE	1571#28, 1.25/13P-2.0/10P*400mm	HENKX
SPEAKER CABLE	1007#24/2.0/10Px300mm	YONGHUA
VGA CABLE	YLD-ZF-889D 1.5 m	YNODA
DVI CABLE	DVI-D	YNODA
POWER CORD	DC-52+DC-53 KTL 1.5m	GLOBAL LINK
EPE	270W EPS	PENGYUANDA
PACKING	BOX 500(H)*165(D)*695mm(W)	CHENGXING
ACCESSORY BOX	270 X BOX	CHENGXING



4 .FRONT SILK DESIGN

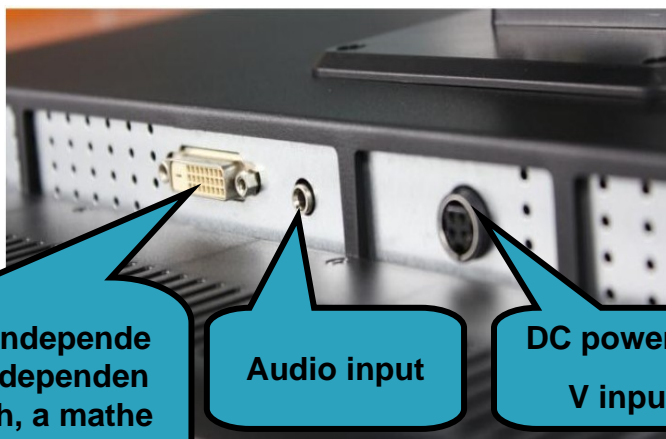

DVI connection independent video card (independent video card; high, a mathematical model in the low end, all available)

Audio input

DC power 24 V input



5. Key operation explanation

